
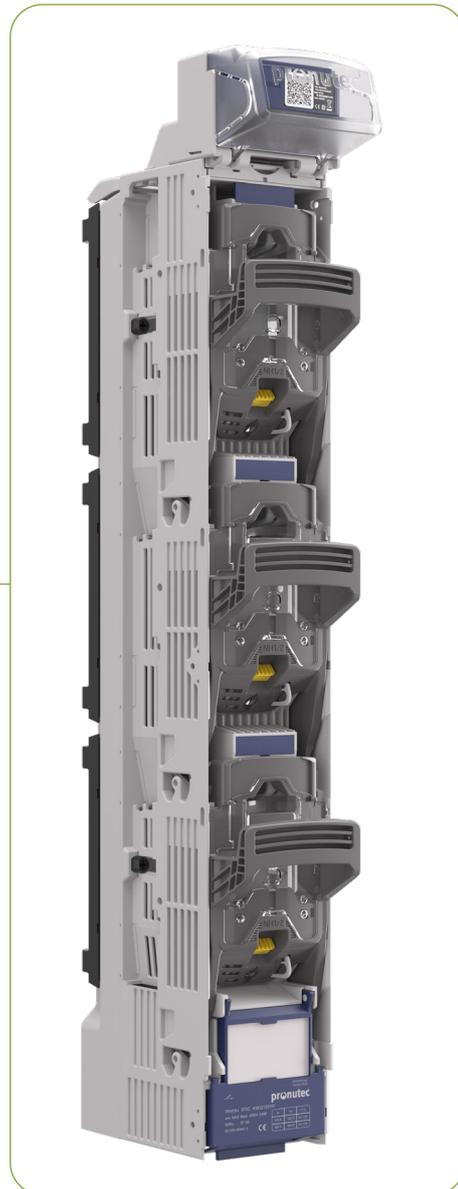


► 04.1 SMART FUSE SWITCH (SFS)

UPPER SOLUTION (NH 00/1/2/3)

SFS upper solution consists of a fuse switch, protection case on top of it, current transformers, voltage connections and feeder meter.

- Compact design & very few cabling
- Protection fuses
- Permits replacement of feeder meters on tension, no need of switching off

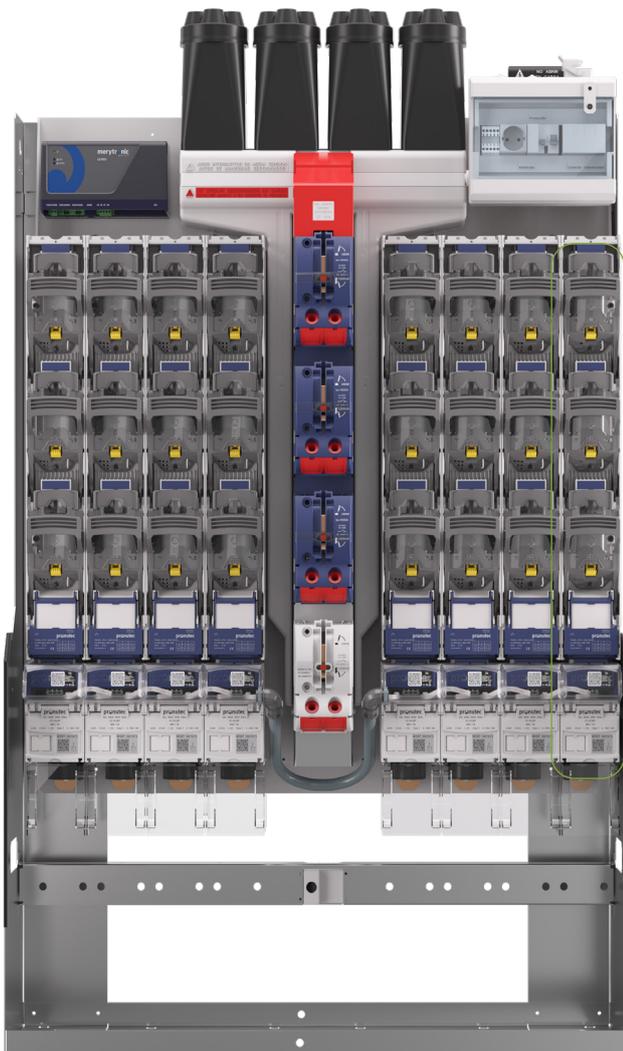

FEATURES

Protection case per outgoing.

Current Transformers /Voltage taps at the back of the fuse switch.



The feeder meter (TSA) is assembled in an upper case on top of the fuse switch. This case includes three protection fuses.

LV Fuse Switch size NH 00/1/2/3

These fuse switches can incorporate the entire range of Pronutec accessories and terminals.



CTs and voltage taps are wired to the protection case in which the feeder meter (TSA) is assembled.

Available current transformers with different current ratios, based on fuse switches amperage.

Current transformer ratios

I prim.	I sec.	VA	Pr. Cl.	FS	Range
250 A	1 A	1,5 VA	1,0	< 5	120 %
400 A	1 A	1,0 VA	0,5	< 5	120 %
600 A	1 A	1,0 VA	0,5	< 5	120 %